



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 13 JUL 2004

WIPO

PCT

CB04 / 2072

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed


Stephen Hordley

Dated

30 June 2004

PRIORITY DOCUMENT
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH
RULE 17.1(a) OR (b)

Patents Form 1/77

Patents Act 1977
(Revised)23MAY03 E009813-1 042838
P01/7700 0.00-0311931.0**Request for grant of a patent***(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)*

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

MJ/CS/OML.69

2. Patent application number

(The Patent Office will fill in this part)

0311931.0

3. Full name, address and postcode of the or of each applicant *(underline all surnames)*Owen Mumford Limited
Brook Hill
Woodstock
Oxford OX20 1TUPatents ADP number *(if you know it)*

445738002

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

4. Title of the invention

Improvements relating to pill
dispensing devices5. Name of your agent *(if you have one)*

Wynne-Jones Laine & James

"Address for service" in the United Kingdom
to which all correspondence should be sent
*(including the postcode)*22 Rodney Road
Cheltenham
Gloucestershire GL50 1JJPatents ADP number *(if you know it)*

1792001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and *(if you know it)* the or each application number

Country

Priority application number
*(if you know it)*Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
*(day / month / year)*8. Is a statement of inventorship and of right to grant of a patent required in support of this request? *(Answer 'Yes' if:*

Yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d)*

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 5

Claim(s)

Abstract

Drawing(s) 2 only

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date 23.05.2003

Wynne-Jones, Laine & James

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr M James 01242 515807

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Improvements Relating to Pill Dispensing Devices

There is a need for a device for attachment to a pill bottle to enable correct doses of pills to be determined by the user for dispensing at a required time. There are a number of such devices in existence, but the invention aims to provide such a device which is relatively easy to operate and is not complex in construction.

According to the present invention there is provided a pill dispensing cap for a bottle having inner and outer sleeves, the inner sleeve having an intermediate divider panel and a first base panel and the outer sleeve having a second base panel located immediately below the first base panel, first and second window openings defined in the first and second base panels, a plate moveable across and within the two sleeves and defining a third window opening, a fourth window opening defined in said divider panel, and a releasable locking arrangement whereby the plate can be held in an initial position wherein the first and second windows are aligned, whilst the third and fourth windows are not aligned, the outer sleeve being rotatable forwardly to a condition wherein the first and second windows are not aligned and the locking of the plate is released to enable the plate to be slid across to a condition wherein the third and fourth windows are aligned to allow pills in a bottle to enter the inner sleeve, replacement of the plate to its initial condition then allowing the outer sleeve to be rotated back to its initial condition, thus allowing pills to be dispensed from the inner container via the aligned first and second windows.

With this type of arrangement of a dispensing cap, pills can be released from a bottle into the inner sleeve when the plate has been slid across within the

two sleeves to allow pills to be dispensed through the aligned third and fourth windows. The user can ensure that the correct number of pills are present within the dispensing cap before the plate is moved back to its initial condition, thus closing off the alignment of the third and fourth windows. The outer sleeve
5 is then rotated to the initial condition to allow the pills to be dispensed to the user through the first and second windows.

The locking arrangement for holding the plate in the initial condition can be a notch in the plate into which the end of a groove in the outer container, receiving said plate, can be located.

10 Ideally, the plate will be spring loaded into the initial condition wherein part of the plate projects outwardly of the two sleeves, thus into a "fail safe" condition.

The plate desirably carries a boss limiting the extent of outward projection of the plate from the two sleeves.

15 The inner and outer sleeves may simply be interconnected by a snap-fit arrangement which allows for rotation of the outer sleeve.

Ideally, the cap will additionally enable the user to see how many doses have been dispensed, either by indicating the total number of doses or, for example, indicating the last day on which a dose was dispensed. Thus, the cap
20 can include an indicator ring positioned between the two sleeves and movable upon rotation of the outer sleeve between separate ones of a series of temporary locating formations on the inner sleeve. In the preferred arrangement a ratchet leg is provided on the outer sleeve for cooperation with one of a series of ratchet teeth or grooves on the outer face of the indicator ring, designed to

enable rotation of the indicator ring with the outer sleeve only in one direction of rotation of the outer sleeve. The indicator ring can carry notations of the number of doses of pills supplied by the cap through a viewing window.

5 The invention may be performed in various ways and a preferred example thereof will now be described, with reference to the accompanying diagrammatic drawings, in which:

Figure 1 is a side perspective view of a pill dispensing cap of this invention;

10 Figure 2 is a view similar to Figure 1, but during an initial stage of operation of the cap; and

Figure 3 is an exploded perspective view of the various parts of the pill dispensing cap of Figures 1 and 2.

15 As shown in the drawings, a standard pill bottle 1 has a pill dispensing cap 2 screwed onto the mouth of the bottle. If desired, this interconnection can incorporate a standard tamper proof interlocking arrangement which prevents inadvertent removal of the cap from the bottle. As can be seen more readily from Figure 3, the cap incorporates an outer sleeve 3 and an inner sleeve 4, both of which are formed from a transparent plastics material. The sleeve 4 is secured within the sleeve 3 by a snap-fit location arrangement comprising a split
20 spigot 5 locating into a locking hole 6 in the base panel 7 of the inner sleeve 4. Trapped between the inner and outer sleeves is an indicator ring 8. A plate 9 is slidably received through grooves 10 and 11 respectively formed in the sleeves 3 and 4. A snap-locating locking boss 12 limits the extent of removal of the plate from within the sleeves 3 and 4 and a biasing leaf spring 13 acts to push the

plate outwardly to that limit.

In a normal condition, as shown in Figure 1, the plate 9 is in its outward condition and the outer sleeve 3 will have been rotated anti-clockwise to an extent whereby the end of the groove 11 will locate within a notch 14 of the plate 9. In this condition a first window 15 in the base panel 7 of the inner sleeve 4 is aligned with a second window 16 in a base panel 17 of the outer sleeve 3. The outer sleeve is then rotated clockwise so that the first and second windows 15 and 16 are no longer aligned and the interengagement of the groove 11 of the notch 14 is released. The plate 9 can now be pushed inwardly, by pressing on a finger plate 18, resulting in alignment of a third window 19 in the plate 9 with a fourth window 20 in a divider panel 21 within the inner sleeve 4. Pills within the bottle 1 can now be shaken out through the aligned windows 19 and 20 into the lower part of the inner sleeve 4. Once the user is satisfied that the correct number of pills are present within the inner sleeve 4, the plate 9 is released so that it moves outwardly under the bias of the spring 13 (and/or by pulling on the finger plate 18) so that the windows 19 and 20 are no longer aligned. The outer sleeve 3 is then rotated anti-clockwise back to the start position with the result that the windows 15 and 16 come into alignment. This allows the dose of pills to be released from the lower part of the inner sleeve 4 to the user.

When the outer sleeve 3 is initially rotated in a clockwise direction, a ratchet leg 22 is allowed to ride past ratchet grooves (or teeth) 23 on the indicator ring 8. However, when the outer sleeve 3 is rotated back in the anti-clockwise direction the ratchet leg 22 will engage with one of the ratchet grooves 23 and index round the indicator ring 8, overcoming engagement of locating ribs

5

24 with locating grooves 25 on the outer face of the inner sleeve 4. When the movement is completed, the locator ribs 24 will re-engage with the grooves 25, but with the indicator ring in the next position. The indicator ring 8 carries the numerals 1 to 7 in the sequence 1, 5, 2, 6, 3, 7, 4, which represent the number of doses or days of the week (letters for days of the week could equally well be employed). The indexing round of the indicator ring is such that the next number aligned with a viewing window 26 in a label 27 is two spaces on.

5

10

1/1

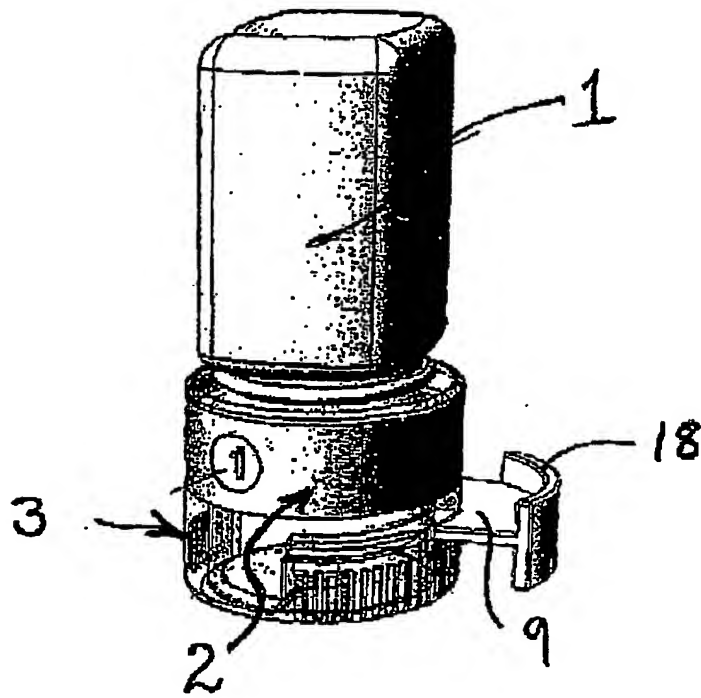


FIG. 1

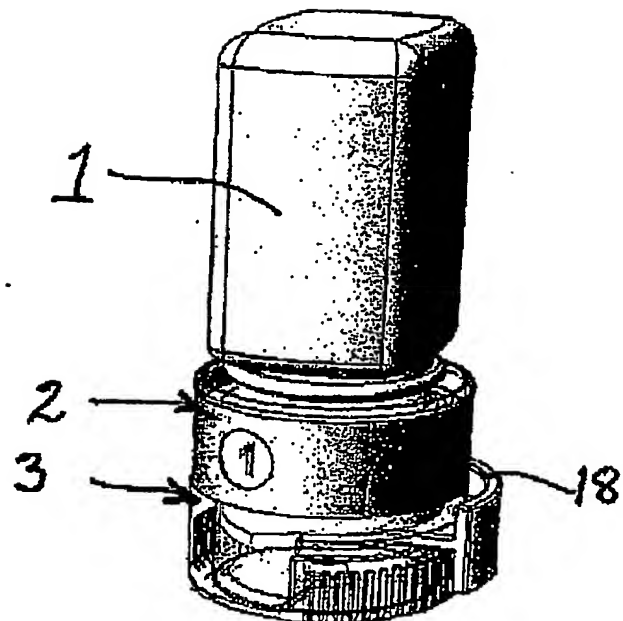


FIG. 2

2/2

